

Welcome to Session 106 The Lean Battery Room

Presented by:

Harold Vanasse

Dan Jones

Sponsored by:





The Lean Battery Room





Seminar Outline

Lean Fundamentals

Battery Needs

Battery Room Basics

Conclusion





Lean is Coming!







Lean Battery Room → Lean DC

 There is a lot of waste to be eliminated in the battery room itself.

 A badly run battery room causes waste in the whole DC.

 The goal of this presentation is to find that waste and propose solutions.





Why...

...hasn't this waste been identified?

- Hard to measure.
- Not seen as important.
- Lack of understanding.
- Fire fighting vs. long term solutions.
- Maintenance vs. operations perspective.





What is Lean?

- Lean is about reducing waste.
 - Six sigma is about reducing variability.

 You cannot change what you are not measuring!

Feedback is required for continuous improvement.





Basic Lean Steps



Identify waste and make a plan to reduce it



Evaluate actual performance compared to plan. Make adjustments.

Implement Plan



Measure actual performance







Identifying Waste

 There are 8 traditional sources of waste in the Lean program.

 We have found that 6 of the 8 occur in the battery room.





TIM P WOOD

- Transportation
- Inventory
- Motion
- People
- Waiting
- Overproduction
- Overprocessing
- Defects







Transportation Waste

 Definition: Excess motion or movement between processes.

- Sources:
 - Battery changes.
 - Trips to the battery room
- Goal: Minimize number of battery changes.





Inventory Waste

- Definition: Excess material or assets.
 - More batteries and chargers than needed to get the job done.
- Sources: Battery and charger assets.
- Goal: Right-Size your fleet.
 - Get your work done with the minimal amount of batteries and chargers without affecting operation.





Motion Waste

- Definition: Excess movement of people who are performing an operation.
- Sources in the battery room:
 - Battery changing process
 - Battery watering process
- Goal:
 - Minimize time to change a battery
 - Minimize time and frequency of watering batteries





People Waste

- Definition: Under utilization of people.
 - It is not necessarily a reduction of people.
 - Using too high a skill level for a job.
- Sources in battery room:
 - Too many people watering and changing batteries.
 - Mechanics/electricians watering batteries.
- Goal: Right person and right number of people for the job.





Waiting Waste

- Definition: Time wasted while waiting for process to begin.
- Sources in the battery room:
 - Operators queuing for battery changes.
 - Waiting while battery is being watered.
- Goal: Manage bottlenecks in the battery room to eliminate queuing.





Over-Production Waste

 Definition: Creating and ordering more than necessary.

Does not apply to the battery room.





Over-Processing Waste

 Definition: Adding more value than needed.

Does not apply to the battery room.





Defects Waste

- Definition: Making errors in the product or service.
- Sources in the battery room:
 - Selecting the wrong battery
 - The wrong battery is the one that is not fully charged and cooled down.
 - Too little or too much watering.

Goal:

- Always pick the battery that is fully charged and cooled down.
- Always water the battery to the appropriate level.







Battery Needs





What is the difference?





- From the outside all batteries look the same.
- It is hard to tell a good one from a bad one.
- Unlike many things in a DC, batteries are chemical and not mechanical.





Batteries are a Mystery

- Where do people get their battery information:
 - Battery expert
 - Urban Legend
 - Old Wives' Tales
 - Bathroom wall
- Because there are so many source, let's review some care & feeding basics





The Nature of a Battery

- Batteries wear out over time and use.
 - Batteries degrade even when not being used.
 - Batteries have a set number of cycles.

 Like brakes & tires they wear out over time, but you can't see the wear.





Battery "Care & Feeding"

- Charging
- Discharging
- Cycling
- Watering
- Cables & Connectors
- Washing






Charging


- Fully charge your battery to make sure that electrolyte is properly mixed.
- Never disconnect when charging.
 - Damages connectors.
 - Possible explosion hazard.
- Allow battery to cool down before using.
 - Heat shortens battery life.
 - Typical industry recommendation is a minimum of 8 hours.





Battery Temperature

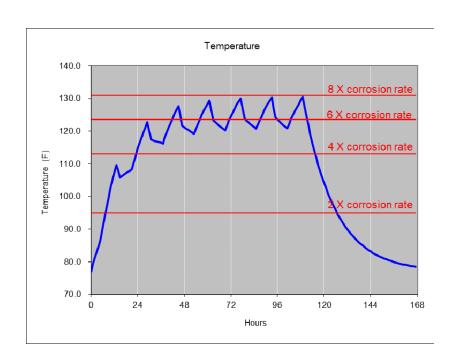

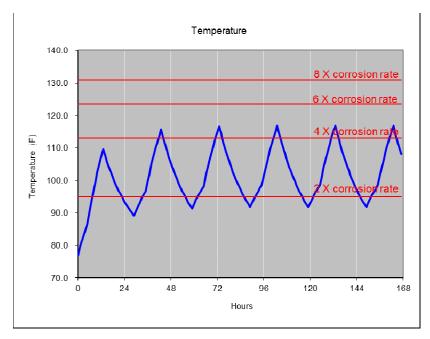

Not enough cool down

Proper cool down





Discharge

- Fully discharge your battery.
 - Partial discharges increase the number of cycles.
 - Decreased productivity; changing batteries is not moving material.
- Do not over-discharge your battery.
 - Permanent battery damage occurs.
- Lift lock-outs must be used and calibrated.





Cycling

Under Cycling

- Batteries corrode even when they are not being used.
- Cycles are wasted.
- Over Cycling
 - No time to cool down.
 - Batteries corrode faster when they are hot.
 - Battery life is shortened and number of cycles is reduced.





Watering

- Not watering your battery:
 - Exposes the plates to air.
 - Exposed surfaces sulfate and lose capacity.
- Over-watering reduces capacity.
 - Battery loses acid.
 - 3% capacity loss for each boil-over.
- Use deionized or distilled water.
 - Dissolved minerals cause battery damage.





Cables & Connectors

- Repair broken cables.
 - Short circuits.
 - Fire and safety hazard.
- Repair broken connectors.
 - Intermittent contact is hard on chargers.
 - Arcing is dangerous.





Washing

- Minimizes short circuits tracking across the surface of the battery.
- Hidden energy loss.
- Minimizes tray corrosion.





Battery "Care & Feeding"

- Implementing these practices will maximize battery performance and life.
 - Charging
 - Discharging
 - Cycling
 - Watering
 - Cables & Connectors
 - Washing





Battery Room Basics













Where To Focus?

The Big Three Impacts:

- 1. Rotation
- 2. Right Sizing
- 3. Battery Watering






1: Rotation

• What is it?

• Why is it important?

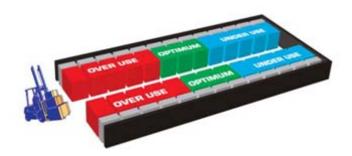









Fast Selections

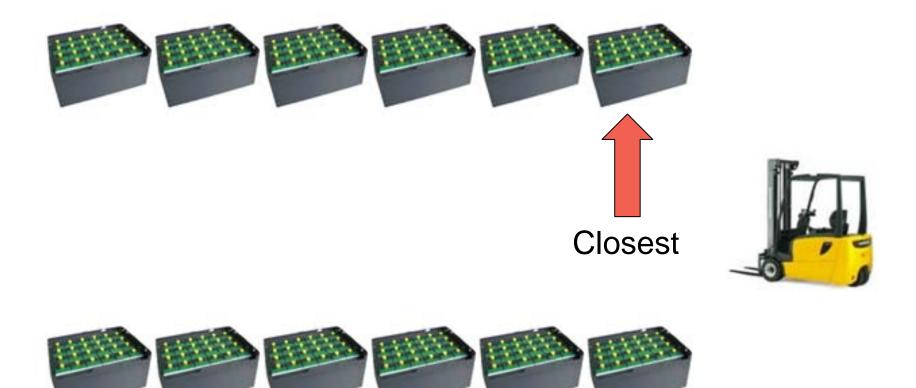






Fewer Selections

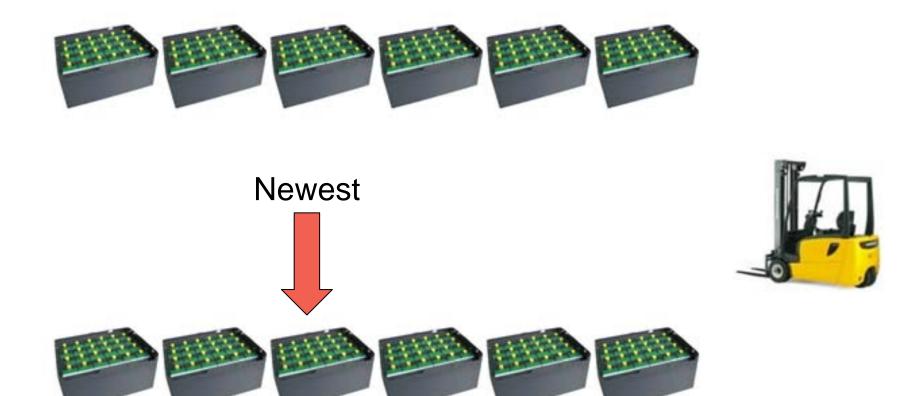





Correct Selections

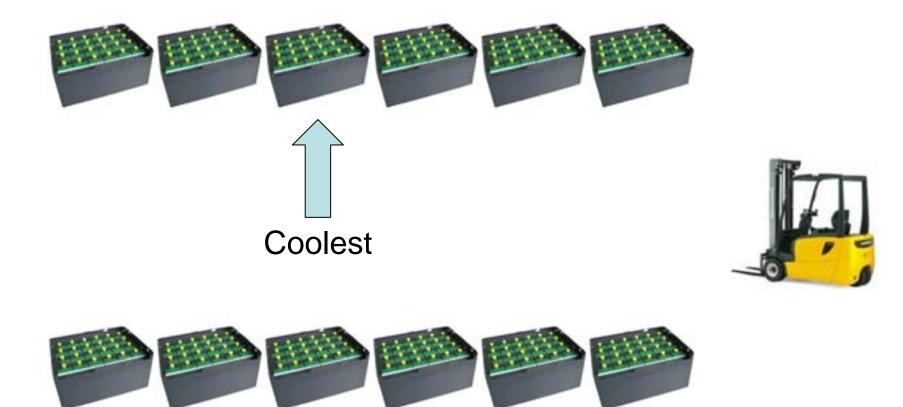





Conflicting Demands

- Pick closest battery to make fast change.
- Pick newest battery and hope to get long run-time.
- Picking coolest battery is best for maximum run time and longest life.





The Challenge

- Picking the coolest battery quickly every time.
 - Run time will be maximized over the long term.
 - Battery damage will be minimized.
- Getting your operators to do this.
 - Make picking the right battery easy.
 - Measure performance for accountability.





Impact of Battery Rotation

- A study done on introduction of good battery rotation practices.
 - Data collected 3 months before and 3 months after proper battery rotation procedure introduced.
- Average battery run-time increased from 6h 30m to 6h 57m.





More Than Just Run Time

 Allowing batteries to cool down is extremely important for battery life.

 Properly rotated batteries will have better cool down time.


This will give you longer life.






Cool Down Time

Without Rotation

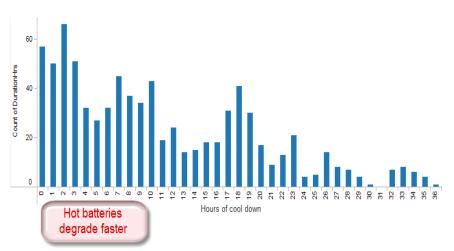

Less than 8-hours of cool down occurs 44% of the time

Proper Rotation

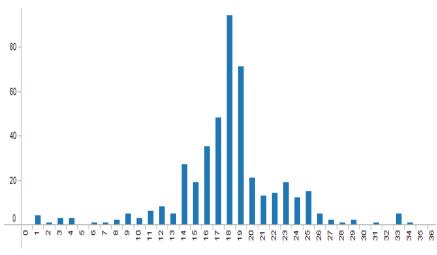

Less than 8-hours of cool down occurs 3% of the time



2: Right Sizing


• What is it?

Why is it important?





Battery Fleet Size

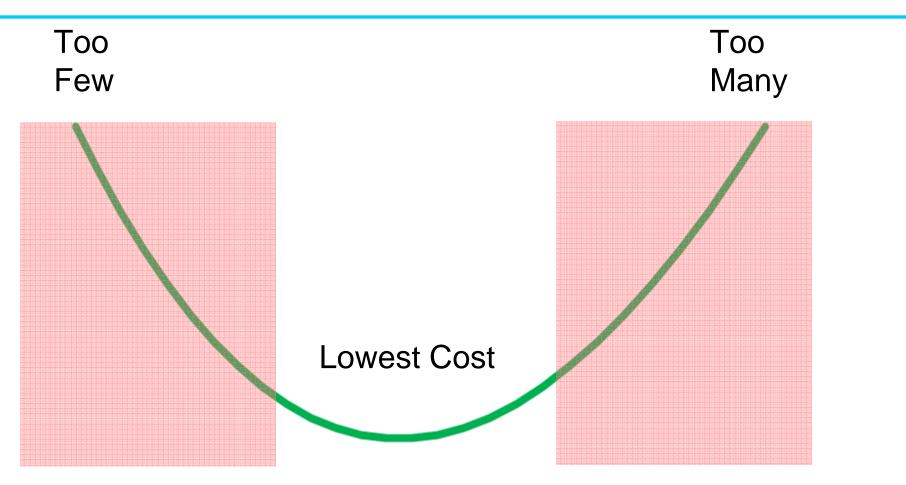








Cost of Not Right-Sizing


- Battery damage
- Short battery life
- Low battery availability
- Disruption to operations

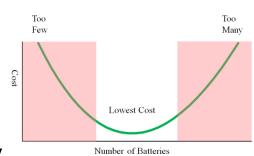



Cost of Not Right-Sizing

- Battery damage
- Short battery life
- Low battery availability
- Disruption to operations

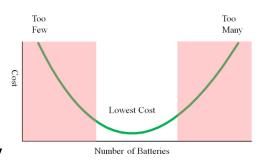

- Too much money spent on batteries.
- Wasted space
- Battery degradation





Challenges for Right-Sizing

- Lack of objective information.
- How much is "right"?
- The right answer changes over time.
 - Batteries age over time
 - Business grows/shrinks over time
 - Busy seasons
 - Equipment changes





Methods for Right-Sizing

- Perform a power study combined with an aging spreadsheet.
- Listen to operators.
- Industry "standard" ratios.
- Lean method.





Power Study

• Pros:

- No investment needed.
- Objective measurement.

Cons:

- Assumptions can be faulty.
- Judgment required.
- Aging spreadsheets become invalid over time or when conditions change.
- No feedback.





Listen to Operators

• Pros:

- No investment and no expense.
- Operators are in contact with what is really happening.

Cons:

- Feedback can be unreliable and subjective.
- Difficult to take action on because it is nonstructured.





Industry "Standard" Ratios

Pros:

Simplest to implement.

• Cons:

- Assumes that all facilities run the same way.
- Does not account for changes over time.





Lean Method

• Pros:

- Objective measurements.
- Actual performance measured.
- Constant feedback & adjustment.
- Cons:
 - Equipment required.






Lean Method


- What Do You Measure?
 - Battery availability at any given time.
 - Cool down time.
 - Battery cycles per week.





Battery Availability

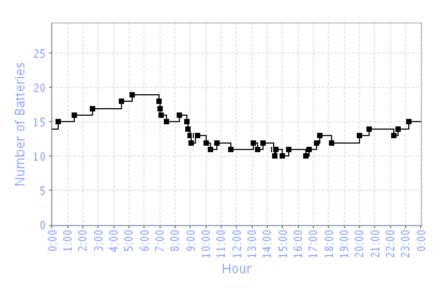

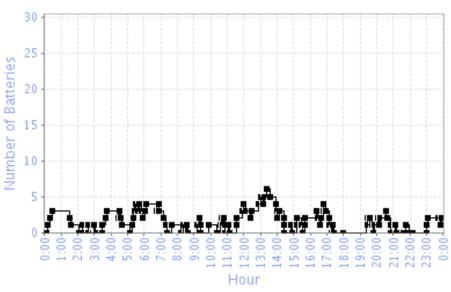

More batteries than needed

Running out of batteries





3: Battery Watering

Is actually two steps:

- Figuring out which battery needs water.
- Actually watering the battery.





Identify Which Batteries Need Water

Three Methods:

- Inspect every battery every week.
 - Slow
- Water batteries by schedule.
 - Complicated
- Use a electrolyte level indicator.
 - Fastest





Methods of Watering

- Manually hose or jug.
 - 18 minutes per battery.
- Watering Gun .
 - 10 Minutes per battery.
- Single Point Watering System.
 - 15 seconds to 4 minutes per battery.

For a 36 Volt Battery





Ideal Lean Battery Room

- Always pick the coolest battery that has finished charging.
- Change batteries quickly.
- Have the right quantity of batteries.
- Only water batteries that need it.
- Water quickly and accurately every time.
- Keep batteries clean.
- Keep cables and connectors in good condition.





Lean Checklist

| Waste | Rotation | Right Sizing | Watering |
|-----------------|----------|-----------------|----------|
| Transportation | O | Q | |
| Inventory | | | |
| Motion | Q | O | |
| People | O | | |
| Waiting | Q | Q | Q |
| Over Production | | | |
| Over Processing | | | |
| Defects | | | |







For More Information:

Speaker: info@phlsci.com

Home Page: www.phlsci.com

Visit ProMat 2011 Booth 327